


MONITORE A COMANDO MANUALE Mod. FI – MM3 MANUAL CONTROL MONITOR Mod. FI - MM3

CE



- = Corpo: Acciaio al carbonio o in acciaio inox
- = Giunti: Montati su doppia corona di sfere provvisti di ingrassatore e muniti di dispositivo di bloccaggio
- = Rotazione: 360° tramite leva
- = Alzo: +70° - 45° tramite leva
- = Connessione bocchello/lancia: flangiata o filettata
- = Verniciatura: con vernici epossiviniliche e finitura con smalto poliuretanico colore rosso RAL 3000.

- = Body: Carbon steel or stainless steel
- = Joints: Mounted on double ring of spheres with greaser and locking device
- = Rotation: 360° by handle
- = Elevation: + 70° - 45° by handle
- = Nozzle/branchpipe connection: flanged or threaded
- = Finishing: Epoxi – primer and polyurethanic enamel color red RAL 3000.

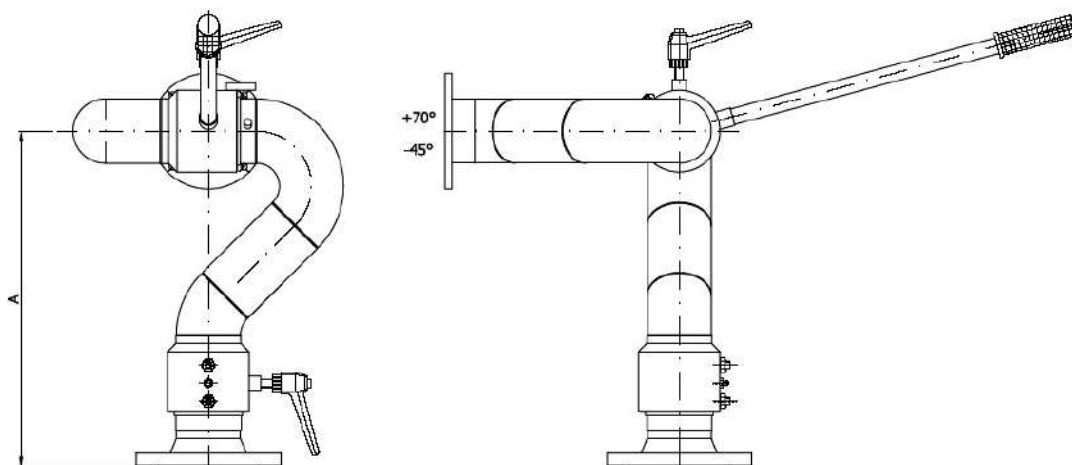

MODELLO	Diametro flange ingresso	Corpo	Portata massima	Materiale Corpo	Quota A	Peso
MODEL	Inlet connections size	Body	Max. Capacity Lt/1'	Body Material	A Dim.	Weight
FI – MM3	3" / 4" UNI / ANSI	3"	4.000	Acc. al carbonio Carbon Steel	465 mm	25 Kg
FI – MM3	3" / 4" UNI / ANSI	3"	4.000	Acc. Inox 304/316 Stainless Steel	465 mm	21 Kg

